


Product details:
DD-type series cooling fan main technical parameter table:

Model	Nominal cooling capacity W(kcal/h) t=-18℃ Δt=t-t0=7℃	Cooling area (m2)	Pitch of fins (mm)	Fan							Defrost electrothermal tube			Weight (kg)	Remark
				Number	Diameter (mm)	Air volume (m2/h)	Wind pressure (mmH2O)	Range (m)	Fan power (W)	Motor voltage (V)	Coil (kw)	Water pond (kw)	Voltage (V)		
DD-1.4/7	1400 (1200)	7	6	1	Ø330	1700	98(10)	8	90	380	0.9	0.4	220	27	R134a R404a R507
DD-2.35/12	2350 (2000)	12	6	2	Ø330	2×1700	98(10)	8	2×90	380	1.2	0.4	220	40	
DD-3.0/15	3000 (2600)	15	6	2	Ø330	2×1700	98(10)	8	2×90	380	1.35	0.45	220	46	
DD-4.0/22	4000 (3450)	21.5	6	3	Ø330	3×1700	98(10)	8	3×90	380	1.8	0.6	220	55	
DD-6.0/30	6000 (5150)	30	6	2	Ø400	2×3000	118(12)	12	2×250	380	2.6	1.3	220	70	
DD-8.0/40	8000 (6900)	40	6	2	Ø400	2×3000	118(12)	12	2×250	380	2.8	1.4	220	80	
DD-12.0/60	12000 (10300)	60	6	2	Ø500	2×6000	167(17)	15	2×550	380	6.0	1.5	220	115	
DD-15.9/80	15900 (13700)	80	6	2	Ø500	2×6000	167(17)	15	2×550	380	7.5	1.5	220	150	
DD-20.0/100	20000 (17200)	100	6	3	Ø500	3×6000	167(17)	15	3×550	380	9.5	1.9	220	170	
DD-24.0/120	24000 (20650)	120	6	3	Ø500	3×6000	167(17)	15	3×550	380	11.0	2.2	220	200	
DD-28.0/140	28000 (24100)	140	6	4	Ø500	4×6000	167(17)	15	4×550	380	12	2.4	220	240	
DD-32.1/160	32100 (27600)	160	6	4	Ø500	4×6000	167(17)	15	4×550	380	12.5	2.5	220	260	
DD-37.4/200	37400 (32200)	201	6	2	Ø600	2×10000	200	18	2×1100	380	15.2	1.9	220	356	
DD-46.8/250	46800 (40300)	256	6	3	Ø600	3×10000	200	18	3×1100	380	17.6	2.2	220	400	
DD-56.2/310	56200 (48300)	307	6	3	Ø600	3×10000	200	18	3×1100	380	20	2.5	220	420	

Cooling fan installation dimensions:

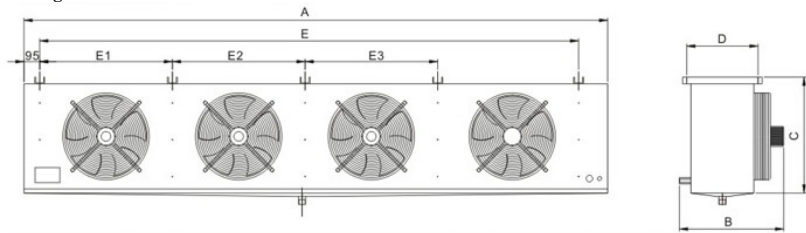

Model	A	B	C	D	E	E1	E2	E3	F	Into liquid pipe diameter (mm)	Back tracheal diameter (mm)	Water outlet pipe diameter (ZG)	Appearance schemes	
DD-1.4/7	680	435	465	270	480	/	/	/	85	12	16	3/4"		
DD-2.35/12	1030	435	465	270	830	/	/	/	85					
DD-3.0/15	1130	435	465	270	930	/	/	/	85					
DD-4.0/22	1580	435	465	270	1380	/	/	/	85	16	25			
DD-6.0/30	1520	600	560	370	1250	600	/	/	95					
DD-8.0/40	1520	600	560	370	1250	600	/	/	95					
DD-12.0/60	1820	650	660	430	1550	750	/	/	95	16	32			
DD-15.9/80	1820	650	660	430	1550	750	/	/	95					
DD-20.0/100	2300	650	660	430	2030	660	660	/	95					
DD-24.0/120	2720	650	660	430	2450	800	800	/	95	19	38			
DD-28.0/140	3120	650	660	430	2850	700	700	700	95					
DD-32.1/160	3520	650	660	430	3250	800	800	800	95					
DD-37.4/200	2220	1060	860	630	1950	950	/	/	95	22	50			
DD-46.8/250	2720	1060	860	630	2450	800	800	/	95					